

RECEIVED  
CENTRAL FAX CENTER

U.S. Serial Number: 10/773,789  
Reply to Office Action of: April 11, 2006  
Family Number: P2003J011-US2 (PEP-0404)

AUG 16 2006

Page 2 of 16

**AMENDMENTS TO THE CLAIMS**

This listing of the claims will replace all prior versions and listings of claims in the application:

1. (Currently Amended) A method for recovering acid from a feed mixture comprising acid, hydrocarbons and water, the method comprising:

processing said feed mixture that comprises from about 70 to about 98 percent by weight acid using a first polymeric membrane to form a first retentate containing a substantially greater concentration of hydrocarbons than said feed mixture and a first permeate product containing a ~~substantially~~ greater concentration of acid ~~and water~~ than said feed mixture, said first polymeric membrane being selectively permeable to the acid ~~and water~~ over the hydrocarbons in the feed mixture.

2. (Original) The method of claim 1 wherein said first polymeric membrane is selected from the groups of:

- (a) PVA;
- (b) crosslinked PVA;
- (c) PVS;
- (d) crosslinked PVS; or
- (e) a combination of (a) through (d).

3. (Canceled)

4. (Original) The method of claim 1 wherein said feed mixture contains from about 70 to about 98 wt% sulfuric acid, from about 1 to about 20 wt% hydrocarbons, and from about 0.5 to about 7 wt% water.

U.S. Serial Number: 10/773,789  
Reply to Office Action of: April 11, 2006  
Family Number: P2003J011-US2 (PEP-0404)

Page 3 of 16

5. (Currently Amended) The method of claim 1 wherein said first retentate contains a concentration of hydrocarbons of at least about 3 wt% greater than said feed mixture, and said first permeate product contains a concentration of acid ~~and water~~ of at least about 1 wt% greater than said feed mixture.

6. (Currently Amended) The method of claim 1 wherein said first retentate contains a concentration of hydrocarbons of at least about 10 wt% greater than said feed mixture, and said first permeate product contains a concentration of acid ~~and water~~ of at least about 3 wt% greater than said feed mixture.

7. (Currently Amended) The method of claim 1 wherein said first retentate contains a concentration of hydrocarbons of at least about 18 wt% greater than said feed mixture, and said first permeate product contains a concentration of acid ~~and water~~ of at least about 6 wt% than said feed mixture.

8. (Original) The method of claim 1 wherein said acid is sulfuric acid.

9. (Currently Amended) The method of claim 1 wherein said feed mixture comprises:

- (a) acid, ranging from about 80 wt% to about 98 wt%;
- (b) water, ranging from about 0.5 wt% to about 5 wt%; or
- (c) hydrocarbons, ranging from about 1 wt% to about 15 wt%.

10. (Currently Amended) A method for recovering acid from a feed mixture comprising acid, hydrocarbons and water, the method comprising:

U.S. Serial Number: 10/773,789  
Reply to Office Action of: April 11, 2006  
Family Number: P2003J011-US2 (PEP-0404)

Page 4 of 16

processing said feed mixture that comprises from about 70 to about 98 percent by weight acid using a first polymeric membrane to form a first retentate containing a substantially greater concentration of hydrocarbons than said feed mixture and a first permeate product containing a ~~substantially~~ greater concentration of acid ~~and water~~ than said feed mixture, said first polymeric membrane being selectively permeable to the acid ~~and water~~ over the hydrocarbons found in the feed mixture;

processing said first permeate product using a second water reduction means to form a ~~first stream~~ second retentate containing a substantially greater concentration of acid than said first permeate product and a second ~~stream~~ permeate product containing a substantially greater concentration of water than said first permeate product; and

recovering said first stream.

11. (Original) The method of claim 10 wherein second water reduction means is a polymeric membrane and said first and second polymeric membranes are selected from the group consisting of perfluorinated ionomer membranes, sulfonated perfluorinated membranes, and polyethylene polyvinylidene fluoride membranes, oxoanion modified PVA, and crosslinked oxoanion modified PVA.

12. (Original) The method of claim 11 wherein said first and second polymeric membranes are selected from the group consisting of PVA, PVS, crosslinked PVA, crosslinked PVS, polytetrafluoroethylene and Nafion®.

13. (Original) The method of claim 11 wherein said first polymeric membrane is crosslinked PVS and said second polymeric membrane is Nafion®.

U.S. Serial Number: 10/773,789  
Reply to Office Action of: April 11, 2006  
Family Number: P2003J011-US2 (PEP-0404)

Page 5 of 16

14. (Currently Amended) The method of claim 10 wherein said feed mixture contains from about 80 to about 98 percent by weight sulfuric acid strength acid.

15. (Original) The method of claim 10 wherein said second retentate contains from about 70 to about 99.5 percent by weight acid.

16. (Original) The method of claim 10 wherein said second retentate is of sufficient acid strength to be used as a makeup catalyst in an alkylation process.

17. (Original) The method of claim 10 wherein said mixture comprises spent sulfuric acid from an alkylation process, and said second retentate is recycled to the alkylation process.

18. (Original) The method of claim 10 wherein said feed mixture contains from about 80 to about 98 wt% sulfuric acid, from about 1 to about 20 wt% hydrocarbons, and from about 0.5 to about 7 wt% water.

19. (Currently Amended) The method of claim 10 wherein said first retentate contains a concentration of hydrocarbons of at least about 3 wt% greater than said feed mixture, and said first permeate product contains a concentration of acid and ~~water~~ of at least about 1 wt% greater than said feed mixture.

20. (Currently Amended) The method of claim 10 wherein said first retentate contains a concentration of hydrocarbons of at least about 10 wt% greater than said feed mixture, and said first permeate product contains a concentration of acid and ~~water~~ of at least about 3 wt% greater than said feed mixture.

U.S. Serial Number: 10/773,789  
Reply to Office Action of: April 11, 2006  
Family Number: P2003J011-US2 (PEP-0404)

Page 6 of 16

21. (Currently Amended) The method of claim 10 wherein said first retentate contains a concentration of hydrocarbons of at least about 18 wt% greater than said feed mixture, and said first permeate product contains a concentration of acid and ~~water~~ of at least about 6 wt% greater than said feed mixture.

22. (Currently Amended) The method of claim 11 wherein said second retentate contains a concentration of acid at least 1 wt% greater than said first permeate product, and said second permeate product contains a concentration of water at least 3 wt% greater than said first permeate product.

23. (Currently Amended) The method of claim 11 wherein said second retentate contains a concentration of acid at least 3 wt% greater than said first permeate product, and said second permeate product contains a concentration of water at least 10 wt% greater than said first permeate product.


24. (Currently Amended) The method of claim 11 wherein said second retentate contains a concentration of acid at least 6 wt% greater than said first permeate product, and said second permeate product contains a concentration of water at least 18 wt% greater than said first permeate product.

25. (Original) The method of claim 11 wherein at least one of said membranes comprises a copolymer of perfluoroethylene and perfluorovinylether, wherein the perfluorovinylether moiety bears pendant carboxylic acid or sulfonic acid groups.

26. (Original) The method of claim 11 wherein at least one of said membranes comprises the following copolymer:

U.S. Serial Number: 10/773,789  
 Reply to Office Action of: April 11, 2006  
 Family Number: P2003J011-US2 (PEP-0404)

Page 7 of 16

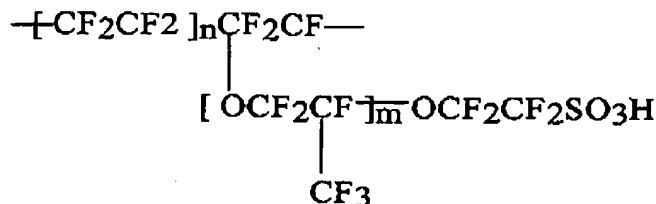

where  $m = 5$  to  $13.5$ ; and  $n = 1,000$ .

27. (Original) The method of claim 10 wherein said acid is sulfuric acid.

28. (Original) The method of claim 10 wherein said second water reduction means include vacuum evaporation.

29. (Original) The method of claim 10 wherein said second water reduction means includes adding a sufficient amount of acid anhydride.

30. (Original) The method of claim 29 wherein said acid anhydride is  $\text{SO}_3$ , or oleum, added in an amount sufficient to reduce water content and increase sulfuric acid content for hydrocarbon alkylation.

31 - 35. (Canceled)

36. (New) A method for recovering acid from a feed mixture comprising acid, hydrocarbons and water, the method comprising:

processing said feed mixture, that comprises from about 70 to about 98 percent by weight acid and having a first ratio of acid to water, using a first polymeric membrane to form a first retentate containing a substantially greater concentration of hydrocarbons than said feed mixture and a first permeate product having a ratio of acid to water

U.S. Serial Number: 10/773,789  
Reply to Office Action of: April 11, 2006  
Family Number: P2003J011-US2 (PEP-0404)

Page 8 of 16

greater than said first ratio, said first polymeric membrane being selectively permicable to the acid over the hydrocarbons in the feed mixture.

37. (New) The method of claim 36 wherein said first polymeric membrane is selected from the groups of:

- (a) PVA;
- (b) crosslinked PVA;
- (c) PVS;
- (d) crosslinked PVS; or
- (e) a combination of (a) through (d).

38. (New) The method of claim 36 wherein said feed mixture contains from about 70 to about 98 percent by weight sulfuric acid.

39. (New) The method of claim 1 wherein said feed mixture contains from about 70 to about 98 wt% sulfuric acid, from about 1 to about 20 wt% hydrocarbons, and from about 0.5 to about 7 wt% water.

40. (New) The method of claim 36 wherein said acid is sulfuric acid.

41. (New) The method of claim 36 wherein said feed mixture comprises:

- (a) acid, ranging from about 80 wt% to about 98 wt%;
- (b) water, ranging from about 0.5 wt% to about 5 wt%; or
- (c) hydrocarbons, ranging from about 1 wt% to about 15 wt%.